

All Purpose Filter (Automatic Solid State)

Model NSPAPFSSA (10" x 47" Tank)

Model NSPAPFXLA (12" x 54" Tank)

The professional contractor can select the mineral and configuration for the filter that best treats the problem water. The North Star All Purpose Filters do not include filtering mineral, sand, or gravel.

All Purpose Filter with Solid-State Control (24 Volt Transformer Included)


Provides precise control of all functions. Has a capacitor to maintain setting up to six hours. Has vacation setting and extra regeneration for high water use.



Specifications

Model	NSPAPFSSA (10" x 47" Tank)	NSPAPFXLA (12" x 54" Tank)
Type of Mineral	not supplied	not supplied
Recommended Amount of Mineral (cu. ft.)	1.0	2.0
Recommended Amount of Gravel Base (lbs.)	17	29
Recommended Amount of Filter Sand (lbs.)	10	15
Inlet Water Pressure Limits (PSI)	20 - 125	20 - 125
Maximum Water Temperature (°F)	120	120
Minimum Inlet Water Flow (gal/hour)	270	420
Backwash Flow Rate (gal/min)	2.5, 5, or 7	2.5, 5, or 7
Pipe Size	1"	1"

Dimensions

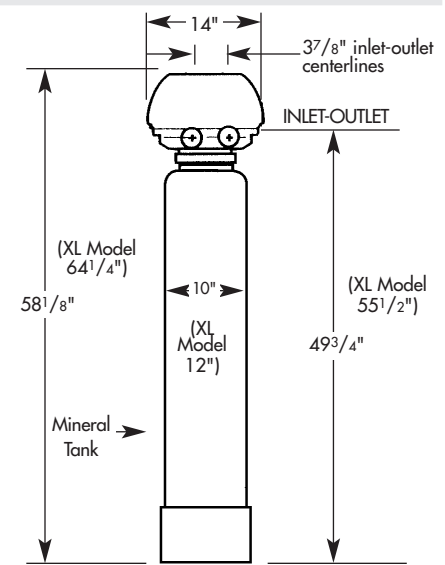

Nominal mineral tank size: 10" x 47"

North Star[®]
WATER CONDITIONING

A Marmon Water/Berkshire Hathaway Company

The Science Behind Better Water[®]



P.O. Box 64310
St. Paul, MN 55164-4310
1-800-972-0135
FAX 651-739-5293
www.northstarconditioning.com

North Star Water Conditioning
5240 Bradco Boulevard
Mississauga, Ontario
Canada L4W 1G7
1-800-79-NORTH

North Star Water Conditioning
Geelseweg 56
2250 Olen
Belgium

North Star Water Conditioning
#1 Independent Bus. Pk. Mill Rd.
Stokenchurch, Bucks
United Kingdom HP14 3TP